


# SSKV-Verschlussmuffe



System: Steckschalenklemmverbindung DBP

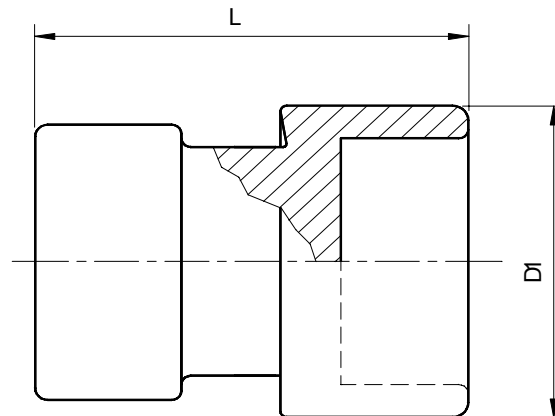

## Schlaucharmaturen für Schläuche nach DIN EN 853-856

Technische Änderungen vorbehalten

DN	Maximaler Arbeitsdruck (bar)					D1 mm	L mm	Bestell-Nr.
	Schlauch Typen							
	2ST	4SP	4SH	R13	R15			
6	700					15		HV062401
10		275	415			18		NV102401
12		275	415			28	40	NV122401
20		215	350			36	40	NV202401
20				420	345	420	36	HV202401
25		165	280			42	45	NV252401
25				380	345	420	45	HV252401
32		125	210			50	55	NV322401
32				325	345	420	50	HV322401
40		90	185			62	60	NV402401
40				290	345	420	64	HV402401
50		80	165			76	65	NV502401
50				250	345	78	65	HV502401
65					345	84	85	HV652401
80	64					99		NV802401
100	64					118		NV862401
125	64					162		NV882401
150	64					167		NV902401

Systeme für Industrie und Handel

**Prange GmbH Waldweg 12 D 45549 Sprockhövel**

**Büro: Zum Ludwigstal 3a, 45527 Hattingen / Lager: Zum Ludwigstal 13, 45527 Hattingen**

Telefon: (02324) 31121 Telefax (02324) 31123 / info@sskv-prange.de/ Internet: <http://www.sskv-prange.de>